


# NES Series 300 Carbon Monoxide (CO) Transmitter

## DESCRIPTION

The NES Series 300 Carbon Monoxide (CO) Transmitter monitors gas concentrations from gas-powered vehicles in underground parking garages and loading docks. With Dwyer Instruments® technology built in, the NES Series 300 is compatible with either BACnet or MODBUS® communication protocol via RS-485 wire, allowing the transmitters to be used with almost any building management controller.

To maximize the accuracy of the transmitters, the sensors can be field-calibrated using the A-449 remote LCD display (see below). When the sensor reaches the end of its life, the display will indicate that the sensor needs to be replaced.

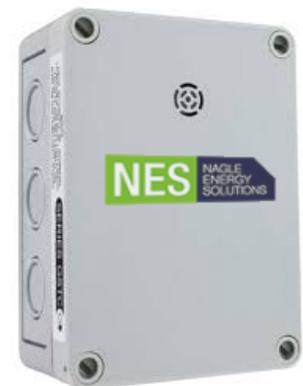

## APPLICATION

To sense carbon monoxide (CO) in a wide variety of commercial and industrial applications, such as vehicle exhaust in parking structures, engine repair shops, tunnels, equipment rooms and ventilation systems, etc., and to transmit to the NES central controller.

## FEATURES


- Industrial grade electrochemical sensor means longer sensor life and less frequent sensor replacements.
- Field replaceable sensors extend transmitter's working life.
- Remote LCD display makes select models more cost effective by only needing one display for multiple transmitters.
- BACnet or MODBUS® communication protocol on GSTC allow for gas sensing solutions to be used with almost any building management controller.

## SPECIFICATIONS (Wall Mounted)

|                           |  |
|---------------------------|--|
| Sensor                    | Field replaceable electrochemical, 4 years typical lifespan.   |
| Range                     | NO <sub>2</sub> : 10 PPM; GSTA CO: Switch selectable 200 or 500 PPM; GSTC CO: 500 PPM.   |
| Output Drift              | <5% per year in air.   |
| Coverage Area             | 5000 to 7500 ft <sup>2</sup> typical.  |
| Accuracy                  | CO: 2% FS; NO <sub>2</sub> : 3% FS, at the time of calibration.  |
| Resolution                | CO: 1 PPM; NO <sub>2</sub> : 0.1 PPM.  |
| Temperature Limits        | -4 to 122°F (-20 to 50°C).   |
| Storage Temperature       | For best sensor life 32 to 68°F (0 to 20°C).   |
| Humidity Limits           | 15 to 90% RH constant; 0 to 99% RH intermittent.   |
| Response Time             | <45 seconds to 90% CO; <25 seconds to 90% NO <sub>2</sub> .  |
| Span and Zero Adjustments | Via pushbutton, using optional A-449 display.  |
| Housing                   | UV resistant glass filled polycarbonate  |
| Output                    | GSTA: Switch selectable 4 to 20 mA, 0 to 5 V or 0 to 10 V; GSTC: BACnet MS/TP or MODBUS® RTU (switch selectable) communication protocol. |
| Power Supply              | GSTA: Current Output: 10 to 35 VDC, Voltage Output: 15 to 35 VDC or 15 to 29 VAC; GSTC: 10 to 36 VDC or isolated 21.6 to 33 VAC.         |
| Electrical Connection     | Removable terminal block, knock outs for conduit fitting.  |
| Calibration               | Via pushbuttons using A-449 display. Span gas concentration is field selectable on CO units.   |
| Weight                    | 1 lb (0.45 kg).  |
| Agency Approvals          | CE.  |

## HOW TO ORDER

Use the **bold** characters from the chart below to construct a product code

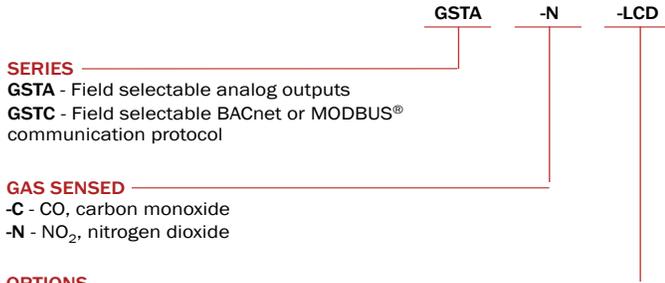


**SERIES** \_\_\_\_\_  
**GSTA** - Field selectable analog outputs  
**GSTC** - Field selectable BACnet or MODBUS® communication protocol


**GAS SENSED** \_\_\_\_\_  
**-C** - CO, carbon monoxide  
**-N** - NO<sub>2</sub>, nitrogen dioxide

**OPTIONS** \_\_\_\_\_  
**BLANK** - Wall mount without options  
**-D** - Duct mount  
**-LCD** - Wall mount with integral LCD


## DIMENSIONS

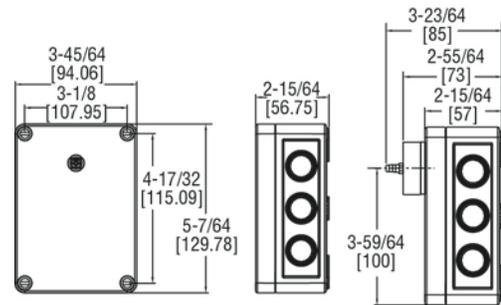


## WIRING DIAGRAMS

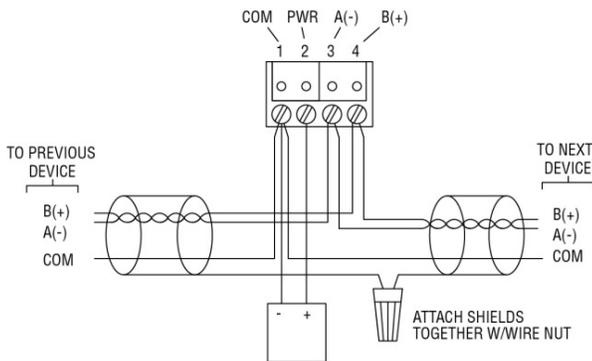


**GSTC Local Power Supply**

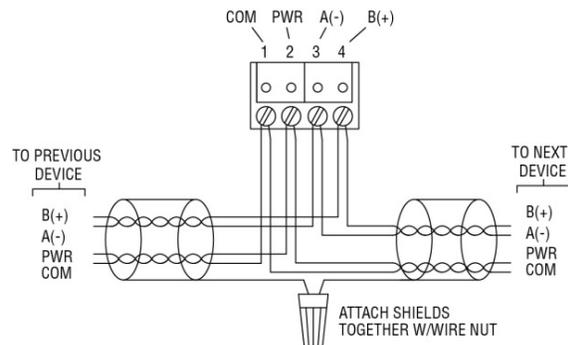

**GSTC Common Power Supply**

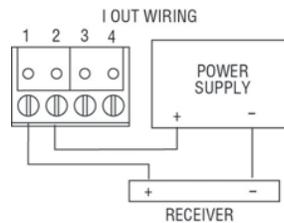

**GSTA Current Output**

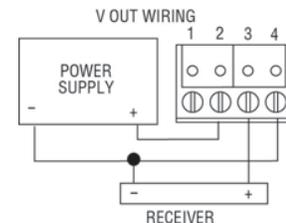

**GSTA Voltage Output**

## ACCESSORIES



**Remote LCD Display**



**CO Replacement Sensor**



**NO2 Replacement Sensor**



**Calibration Adapter**

A-449 – Remote LCD Display  
 A-505 – CO replacement sensor  
 A-506 – NO<sub>2</sub> replacement sensor  
 A-507 – Calibration adapter